

ROCKET ESPRESSO

in Italy. Rocket Espresso produces the finest espresso machines in the tradition of 'Fatto a Mano'

Our small team of craftsmen produce both premium domestic and commercial espresso machines, beautifully made with meticulous care and attention to detail.

today's most exacting espresso customer. Espresso machines will deliver the finest espresso in the cup, More importantly, Rocket designed to meet the needs of time after time, with every model



*With lever in vertical position

performance. industry leading technology and combines the best of tradition with manual control lever machine that Vintage inspired body panelling,

system, coupled with digital PID temperature control Espresso fully saturated group Thermal stability through the Rocket


litres. Direct water connection or built pressure, and a service boiler of 3.6 for pre and post ramping of pump control of pressure through the lever Fully saturated group, with manual

EPICA. Superlative precision equal measure. appreciation for style, and function in and control for baristas with an

EPICA FEATURES

- Lever control with manual pressure profiling (no automatic/semi-
- Graphic colour touch display
- Permanent magnets volumetric silent operation pump for absolutely precise and
- Bodywork all stainless steel
- Boilers all AISI 316L stainless steel made.
- 24 Volt pump, 7.2 litres/min.
- Brew boiler + saturated group assembly: 1.9 litre – 1200 W
- Service boiler: 3.6 litre 1400 W
- Max. power consumption of machine: 1600 W

- 420 x 505 x 645* mm (width x depth x height)
- Weight: 42.4 kg
- Water feed: Hard plumbed operation or pour over operation







R NINE ONE

The R NINE ONE was developed to bring the very best of our commercial machine development programme into a machine capable of outstanding results. Designed for use in a small commercial application or home environment.

Thermal stability through the Rocket Espresso fully saturated group system, coupled with digital PID temperature control

Pre and Post infusion controlled through a full pressure profiling system, using the 5 preset programmes or via manual control through the Rocket Espresso paddle system.

system.

Direct water connection or built in water reservoir, an espresso machine designed to deliver spectacular results in the cup, through both stability and flexibility of control parameters.


R NINE ONE FEATURES

- 5 pump pressure profiles + 1 semiautomatic profile (to be set operating the group's paddle)
- operating the group's paddle)
 Graphic colour touch display
- Permanent magnets volumetric pump for absolutely precise and silent operation
- Bodywork all stainless steel (special order: rubber finishing white or black side and rear panels)
- Boilers all AISI 316L stainless steel made.
- Brew boiler + saturated group assembly: 1.9 litre - 1200 W
- Max. power consumption of machine: 1600 W

• Service boiler: 3.6 litre - 1400 W


- 410 x 505 x 430 mm (width x depth x height)
- Weight: 47.4 kg
- Water feed: Hard plumbed operation or pour over operation



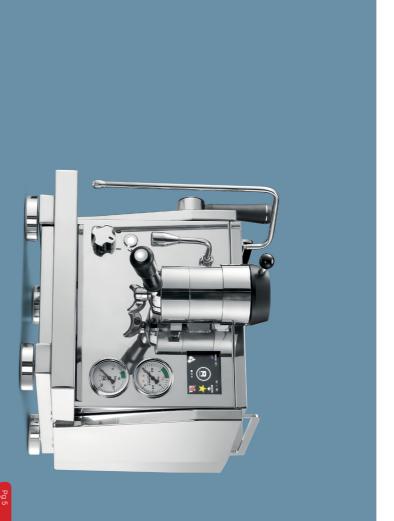



Dual Boiler technology + saturated group + pump pressure profiling

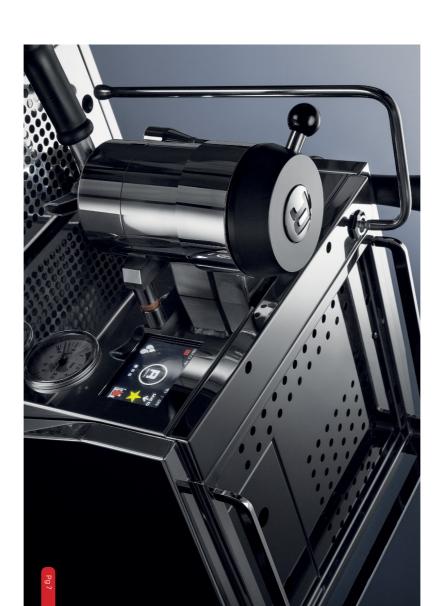

R 60V

R 60V has a unique pressure profiling system.

in the cup with the ability to fine tune system allows further enhancement R 60V with a unique pressure profile the coffee to produce espresso. The pump pressure over the course of the extracts the flavours and oils from Traditionally 9 bar of pump pressure

intervals, each allowing for a profiling system uses a five step flavours being chased. depending on the coffee type and up or ramp down pump pressure making it possible to both ramp different pressure to be programmed, to be split into five different time approach to allow the extraction The Rocket Espresso pressure

ROCKET

or through the machine wifi made through a remote controller The Rocket Espresso communication time temperatures, pressures and system which will display real pod allows adjustments to be

Rotary pump with water reservoir Dual boiler and PID controlled. or direct water connection.

R 60V FEATURES

- of 0.58 and 1.8 litres Dual stainless steel boilers
- PID controlled
- Rotary pump pressure profile system
- communication pod Rocket Espresso
- Shot timer
- 2.5 litre water reservoir or direct
- Height adjustable feet Full stainless steel chassis water connection option


DIMENSIONS Wattage: 1650 W

as standard

Stainless steel cup frame

- 310 x 440 x 390* mm (width x depth x height)
- Weight: 29.5 kg

*excluding cup frame

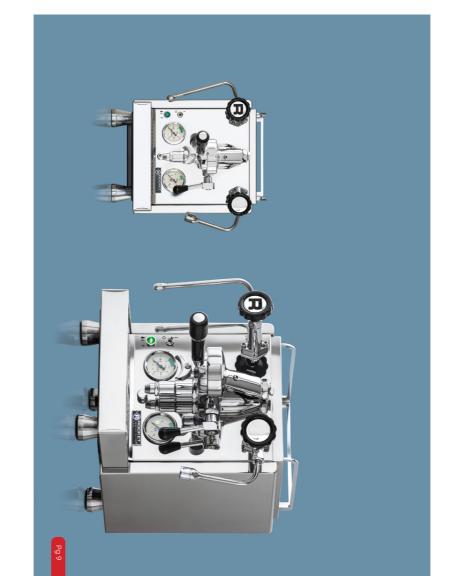

R CINQUANTOTTO

from Rocket Espresso. Cinquantotto means 58, the new R 58 Dual independently operated

draws from the machines internal Commercial grade rotary pump means precise group temperature for optimum extraction of any machine to have a direct water water reservoir or allows for the levels of temperature stability. adjustment and unprecedented Espresso inclined boiler technology coffee type or roast style. Rocket PID controlled boilers allowing

> communication pod can easily be the aesthetic that is Rocket Espresso. removed from the machine to retain go whenever you need coffee. The includes an automatic on / off communication pod that now by the machine touch screen function, your machine is ready to

Machine functions are controlled

R CINQUANTOT TO FEATURES

- Dual boilers of 0.58 and 1.8 litres
- PID controlled
- Rotary pump
- Rocket Espresso communication pod
- Digital shot timer
- 2.5 litre water reservoir or direct water connection option
- Height adjustable feet
- Stainless steel cup frame as standard
- Wattage: 1600 W

DIMENSIONS


connection from the water supply

 310 x 440 x 385* mm (width x depth x height)

Weight: 29.0 kg

*excluding cup frame



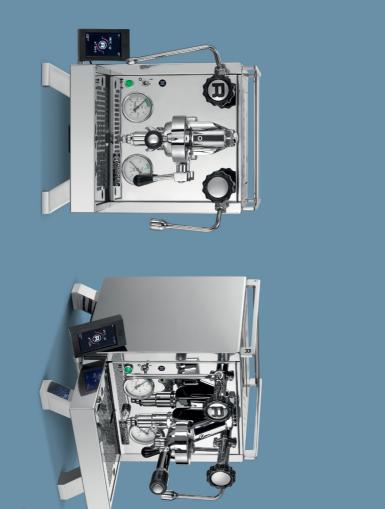

Giotto & Mozzafiato Cronometro R

superior technology that is normally only found in full sized commercial commercial espresso machine range Features taken directly from our espresso machines. give the Cronometro machines

and the Rocket Espresso 9 mm boiler temperature control, insulated boilers control is further enhanced. end plates, stability and temperature Now with digital shot timer, PID

> machine draw water from the internal machine reservoir or alternatively and allows the user to have the quiet yet robust pump performance The use of a rotary pump ensures connect the machine directly to the water supply.

the Giotto or the Mozzafiato.






Cronometro machines are equipped with shot timer as standard.

CRONOMETRO R FEATURES

- Digital shot timer
- Heat exchanger boiler design
- PID control for greater temperature stability
- Boiler capacity: 1.80 litres
- Full sized commercial rotary pump
- 2.5 litre water reservoir or direct water connection option
- Height adjustable feet
- Stainless steel cup frame as standard
- Wattage: 1350 W

- Giotto; 335 x 420 x 400* mm Weight: 27.8 kg (width x depth x height)
- *425 mm height with cup frame
- Mozzafiato; 280 x 425 x 400 mm Weight: 30.2 kg (width x depth x height)

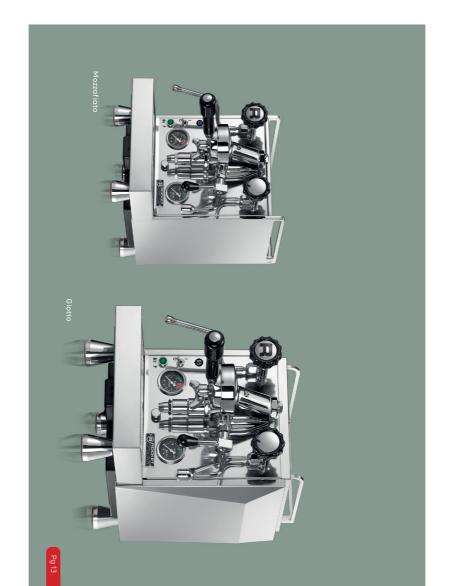

Pg 14

Giotto & Mozzafiato Cronometro V

The Cronometro V model is offered in two different body styles, both with heat exchanger PID temperature control technology.

Now with digital shot timer allowing the user to better optimise extraction time. Temperature control is optimised through a PID controller drawing on 4 different signal parameters to ensure stability and optimum results in the cup.

An adjustable temperature display allows the user to select individual brewing temperatures for different coffee types and roast styles.

The Giotto and Mozzafiato
Cronometro V machines introduce
users to the Rocket Espresso
movement for better espresso in the
home without compromise.

CRONOMETRO V FEATURES

- Digital shot timer
- Heat exchanger boiler design
- Boiler capacity: 1.80 litres
- Vibration pump
- 2.5 litre water reservoir
- PID control for greater temperature stability
 Height adjustable feet
- Height adjustable feet
- Stainless steel cup frame as standard


DIMENSIONS

Wattage: 1350 W

- Giotto; 335 x 420 x 400* mm (width x depth x height)
- Weight: 23.0 kg *425 mm height with cup frame
- Mozzafiato; 280 x 425 x 400 mm (width x depth x height) Weight: 25.4 kg



Cronometro machines are equipped with shot timer as standard.

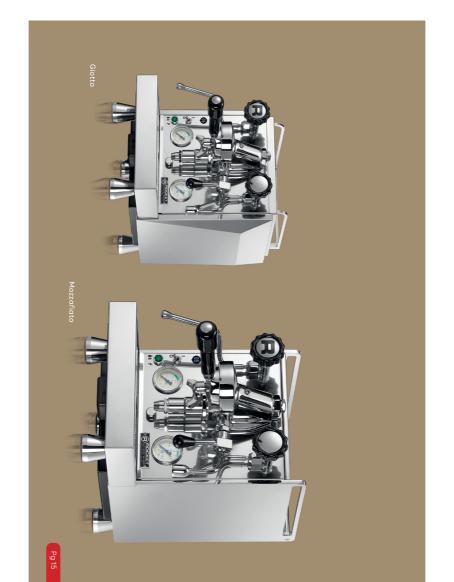

Porta Via

experience where ever they are. people to enjoy the Rocket Espresso The Porta Via is the worlds first truly portable espresso machine allowing

interesting - that 3 star hotel just Travel just got a whole lot more went to a 5 star.


ACCESSORIES

- Measuring spoon
- Rocket tamper
- Milk jug 50 ml

- Bottomless portafilter
- Rocket flat white cups x 2

- Machine out of case, ready to operate: 200 x 405 x 535 mm (width x depth x height)
- Machine inside case: 245 x 450 x 571 mm
- Case (closed with machine inside): (width x depth x height)
- Weight (case with machine inside): 245 x 450 x 550 mm (width x depth x height)
- Volume brew boiler: 470 ml 29.7 Kg
- Volume steam boiler: 730 ml
- Voltage / Wattage:
- 220-240V; 50/60 Hz; 1350 W



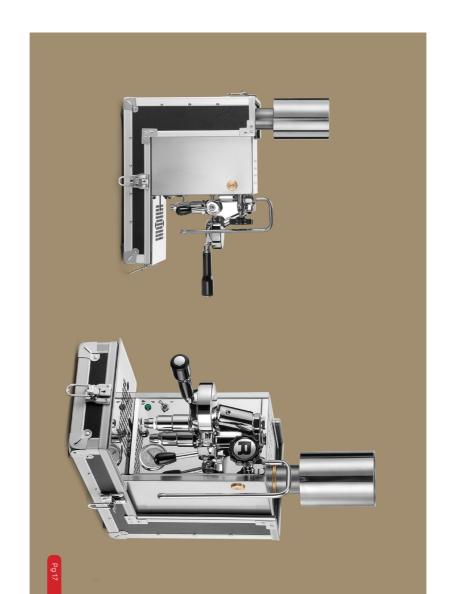

Appartamento

The Appartamento is a compact espresso machine designed for environments where space is at a premium.

Rocket engineers optimised the chassis and layout of the internal components without compromising on the quality and features you expect from Rocket Espresso.

Available to order with a traditional stainless steel finish or Serie Nera edition, featuring a black stainless body and matching cup frame.

Both stainless and Serie Nera editions have the option of white or copper circular side panel inserts.

APPARTAMENTO FEATURES

- Heat exchanger boiler design
- Vibration pump

Boiler capacity: 1.80 litres

• 2.5 litre water reservoir

Wattage: 1350 W

DIMENSIONS

- $274 \times 425 \times 360^*$ mm (width x depth x height)
- Weight: 20.0 kg

*including cup frame







Pg 20

Macinatore Super Fausto

SUPER FAUSTO, big brother to FAUSTO, is a new addition to the Rocket Espresso grinder range designed for commercial settings, in cafes and restaurants where speed and effortless performance are essential.

Equipped with commercial quality 75mm flat burrs, allowing grinding productivities of 4-5 grams/second. Exceptionally long durability is

guaranteed with the Red Speed coated burrs, grinding up to 2,000 - 2,500 kg of coffee before showing signs of wear.

A newly developed 2.8" digital touch screen with shot counter and three programmable portion buttons allow for quick adjustments and effortless portion control.

Close to silent operation, ideal for noise sensitive environments.

SUPER FAUSTO FEATURES

- Grinding: On Demand
- Portion control:
- 3 automatic portions
- Manual continuous grinding
- Patented stepless micrometric grind setting system
- Patented anti-clump & electrostaticity system
- Display: 2.8" digital touch screen with shot counter and brightness adjustability
- Bean container: 540 g
 Grinding blades: Plane
- Grinding blades: Plane 75 mm
 Red Speed coated burrs
- Grinding capacity:
- 4 g to 5 g / second • Motor: 230V / 50 or 115V / 60
- Bodywork: Die cast aluminium

900 W - single phase, RPM 1,360

DIMENSIONS

- 175 x 282 x 480* mm (width x depth x height)
- Weight: 11 kg

*includes bean container





SUPER FAUSTO is available in polished silver or matte black finish.



Macinatore Fausto

of the features and functionality The FAUSTO grinder brings all kitchen, but in a more compact form. professional baristas love to the

to dial in stepless micrometric grind quickly and accurately with an easy 65 mm flat burrs, FAUSTO grinds setting system. Equipped with commercial quality

FAUSTO) and quieter operation, environments. ideally suited to noise sensitive screen interface (taken from SUPER Now with an improved digital touch

compliment your espresso machine. finishing options to perfectly Polished silver or matte black

FAUSTO FEATURES

- Grinding: On Demand
- Portion control: 3 automatic portions
- Manual continuous grinding
- Patented stepless micrometric grind setting system
- Patented anti-clump & electrostaticity system
- Display: 2.8" digital touch screen adjustability with shot counter and brightness
- Bean container: 540 g • Grinding blades: Plane – 65 mm diameter - tempered steel
- Grinding capacity:
- Motor: 230V / 50 or 115V / 60 2.7 g to 3.7 g / second 500 W - single phase, RPM 1,360
- Bodywork: Die cast aluminium

- 172 x 282 x 445* mm (width x depth x height)
- Weight: 10 kg







FAUSTO is available in matte black or polished silver finish.



Macinatore Faustino

powerful features than before. and compact, but with even more The all new Faustino, still small

FAUSTINO FEATURES

- Motor: 310W | 220-230V @ 50/60Hz | 1380 rpm
- 50mm flat burrs
- Hopper capacity: 320g New regulation system with the
- Large adjustment knob for greater grind setting accuracy possibility to set the 0 point
- Silent system
- Easy access to the grinding chamber and screwless burrs

- New user interface with 3 continuous dose programmable doses and
- Rapid Setting interface for programmed doses
- "Hands-free" filter holder support and height-adjustable fork
- Eco-friendly packaging.

DIMENSIONS

- 162 x 246 x 388* mm (width x depth x height)
- Weight: 6.9 kg
- *includes bean container

Four body colour options:

- Matt Black
- Chrome
- Appartamento White
- Appartamento Copper





Technical Specifications

	Mozzafiato Cronometro R	Giotto Cronometro R	RCINQUANTOTTO	R 60V	RNINEONE	EPICA	NO CE	NO DE	
	1	1	1	Yes	Yes	Yes	PRESSURE PROFILE SYSTEM		
	Yes	Yes	Yes	Yes	Yes	Yes	PID PRESSURE CONTROL		
	Yes	Yes	Yes	Yes	Yes	Yes	SHOT		
	1.80	1.80	2.38 (1.8 + 0.58)	2.38 (1.8 + 0.58)	5.5 (1.9 + 3.6)	5.5 (1.9 + 3.6)	TOTAL BOILER CAPACITY (litres)		
	Yes	Yes	Yes	Yes	Yes	Yes	HARD PLUMBING	WATER FEED	
	Yes	Yes	Yes	Yes	Yes	Yes	RESERVOIR	FEED	
	220-240V; 50/60 Hz; 1350W	220-240V; 50/60 Hz; 1350W	220-240V; 50/60 Hz; 1600W	220-240V; 50/60 Hz; 1650W	220-240V; 50/60 Hz; 1600W	220-240V; 50/60 Hz; 1600W	3	WATTAGE	
	280	335	310	310	410	420	2		
	425	420	440	440	505	505	7 		
	400	400	385	390	430	645*	HEIGHT MM		
	30.2	27.8	29.0	29.5	47.4	42.4	0	WEIGHT KO	









*With lever in vertical position R CINQUANTOTTO









Pg 28

Technical Specifications

Appartamento	Porta Via	Mozzafiato Cronometro V	Giotto Cronometro V	MODEL		
ı	1	ı	ı	PRESSURE PROFILE SYSTEM		
Z o	Yes	Yes	Yes	PID PRESSURE CONTROL		
No	N _o	Yes	Yes	SHOT TIMER		
1.80	1.20 (0.47 + 0.73)	1.80	1.80	TOTAL BOILER CAPACITY (litres)		
N _o	N _o	Z o	N _o	HARD PLUMBING	WATER FEED	
Yes	Yes	Yes	Yes	RESERVOIR	FEED	
220-240V; 50/60 Hz; 1350W	WATTAGE					
274	200*	280	335	WIDTH MM		
425	405*	425	420	DEPTH MM		
360	535*	400	400			
20.0	29.7	25.4	23.0	WEIGHT KG		













*Port Via outside of case, ready to operate physical dimensions

PORTA VIA



ROCKET MILANO S.R.L. Via Curiel 13 20060 Liscate Milan, Italy